

**$\Phi 10.5\text{mm}$  635nm Laser Module**

$$P_o: < 3\text{mW}$$

**Features**


1. APC (auto power control) IC inside
2. Low current consumption of the APC circuit
3. Surge current protection
4. High quality glass lens for output beam
5. Adjustable focus

**Absolute maximum ratings**

Item	Symbol	Rating	Unit
Power supply voltage	$V_{cc}$	3.3	V
Laser Module optical output power	$P_o$	<3	mW
Operation temperature	$T_{opr}$	-5~50	$^{\circ}\text{C}$
Storage temperature	$T_{stg}$	-20~70	$^{\circ}\text{C}$

**Electrical and optical characteristics ( $T_c=25^{\circ}\text{C}$ )**

Item	Symbol	Min.	Typ.	Max	Unit	Condition
Wavelength	$\lambda$	-	634	-	nm	$P_o=3\text{mW}$
Operation current	$I_{op}$	-	-	50	mA	$P_o=3\text{mW}$ $V_{cc}=3\text{V}$
Operation voltage	$V_{op}$	2.5	-	3.3	Volt	
Laser Beam spot size at 10m				<8mm		
Divergence angle				0.9 mrad		
Mean time to failure (MTTF) 25 $^{\circ}\text{C}$				>5000 hrs		

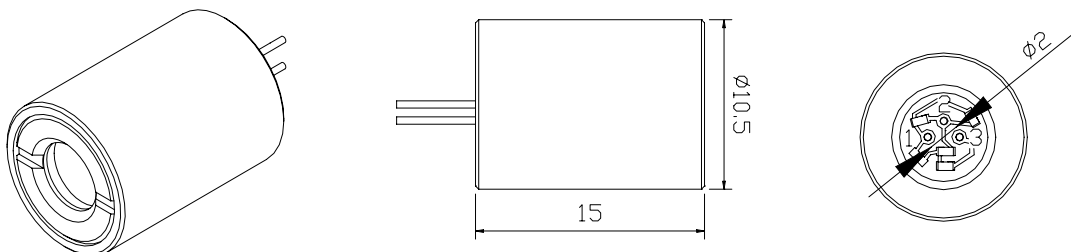
**Outline dimensions (Units: mm)**

Aperture Size : 5mm


**Laser Safety Precautions**

1. Do not look into the laser beam directly by eyes. The laser beam may cause severe damage to human eyes.
2. Optical Lens is made of plastic or glass. Do not contaminate lens by soiling, oil or chemical.

**PIN Assignment:**

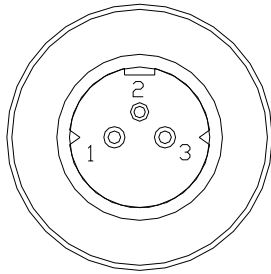

**A type** : Heat sink stand (-)

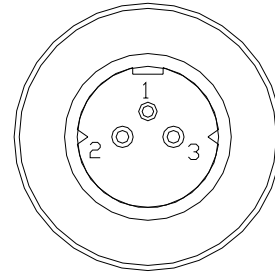

**B type** : Heat sink stand (+)

Pin 1 : Vcc

Pin 2 : GND


Pin 3 : NC ( No external connection )

**Instruction manual**

**1. DC Power connection mode 1**

**A type** : Heat sink stand (-)

**B type** : Heat sink stand (+)

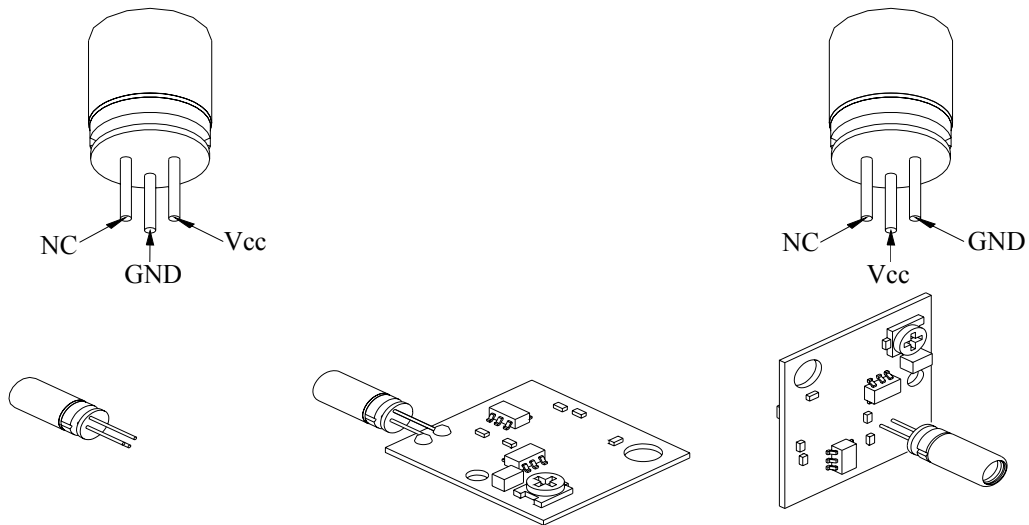

**2. DC Power connection mode 2**

